




(3) CONTACTS PLATED:
12:接触镀金3u"其它GF

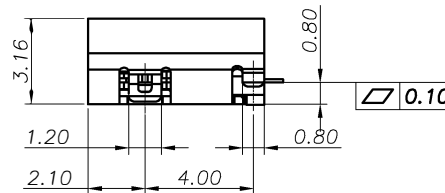

4	SHELL	SUS304 T=0.30mm	NICKEL 30u" MIN PLATING	1PCS	
3	SHIELDING PLATE	SUS301 T=0.15mm	---	1PCS	
2	CONTACT	C18150-H T=0.12mm	NI 50u" MIN. UNDER PLATED OVER ALL Au PLATED ON THE FUNCTIONAL AREA OF CONTACT. PLATING G/F OF THE SOLDER AREA	2SET	
1	HOUSING	PA9T UL94V-O	BLACK	1PCS	
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	

CHECKED BY JAY	DATE 2020.10.12
APPROVED BY JACKY	DATE 2020.10.12
 THIRD ANGLE PROJECTION	

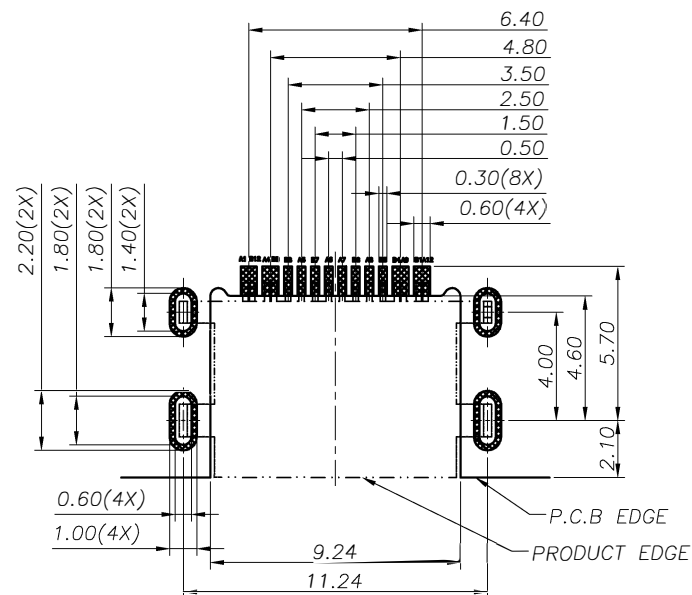


RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 0.80MM;DEFAULT TOLERANCE:±0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

PART NO.:			GOLDCONN TECHNOLOGIES COMPANY LIMITED			DRAWN BY	DATE
SEE THE PART NUMBER CODE						SAM	2020.10.12
QUALITY SYMBOL 0 ▽=0 ▲=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE			CHECKED BY	DATE
			USB CF 16PIN (L=6.5) MID MOUNT 0.8MM			JAY	2020.10.12
			DWG.NO.			APPROVED BY	DATE
			CF061-01		SHEET NO.	JACKY	2020.10.12
			2	OF	3		
			DIMENSION STYLE	DESIGN UNITS	SCALE		
		MM ONLY	METRIC	1:1			
		ANGULAR					

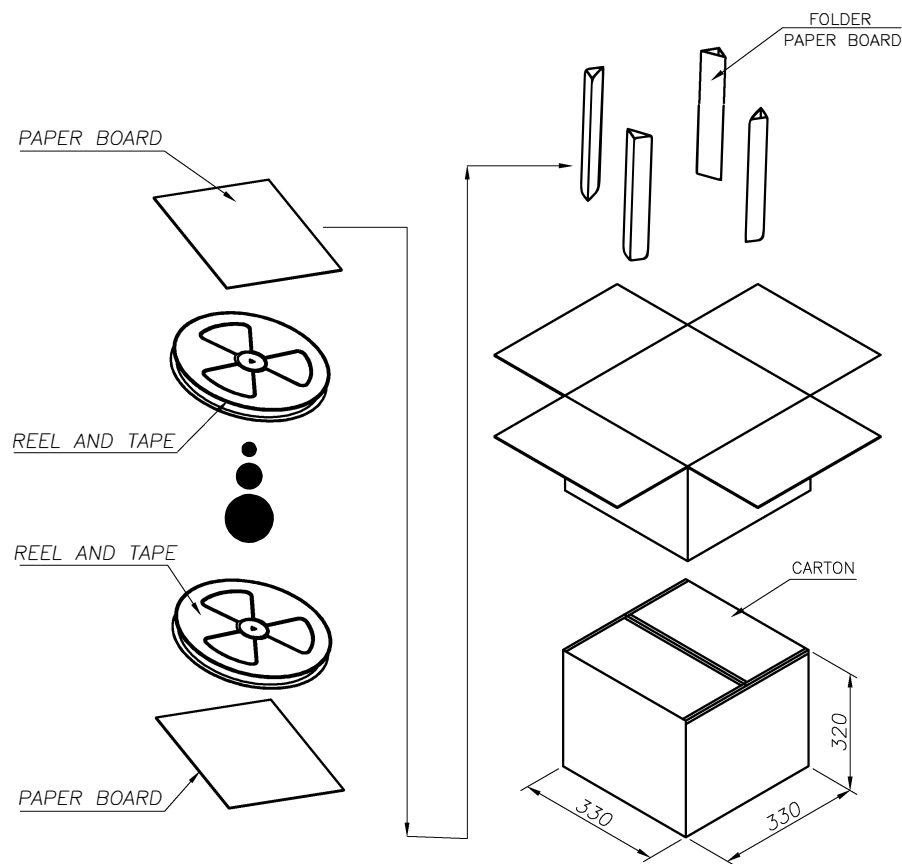

	REEL	CARTON
CONNECTOR (PCS)	1400	14000

PART NO.:			GOLDCONN TECHNOLOGIES COMPANY LIMITED					DRAWN BY		DATE		
SEE THE PARTNUMBER CODE								SAM		2020.10.12		
QUALITY SYMBOL = 0 ▽ = 0 = 0 ▶ = 0 ANGULAR	GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE USB CF 16PIN (L=6.5) MID MOUNT 0.8MM					CHECKED BY		DATE		
								JAY		2020.10.12		
	X.XXXXX		+ ---		DWG.NO. CF061-01		SHEET NO. 3 OF 3		APPROVED BY JACKY		DATE 2020.10.12	
	X.XXX		+ 0.10									
	X.XX		+ 0.20									
	X.X		+ 0.30									
ANGULAR		+ --°		DIMENSION STYLE MM ONLY		DESIGN UNITS METRIC		SCALE 1:1		THIRD ANGLE PROJECTION		