
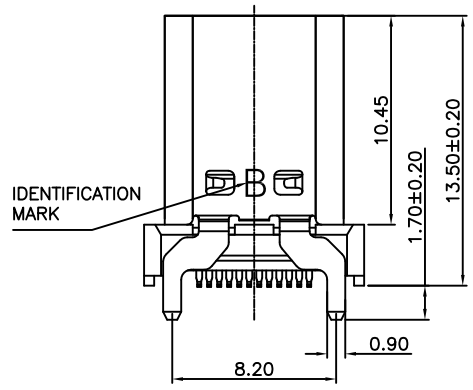
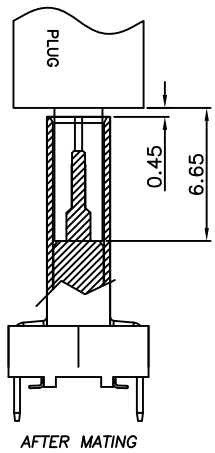

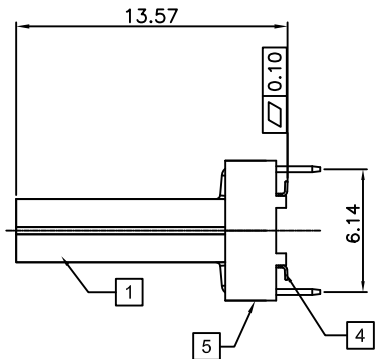




RoHS Compliant

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO ZDT TECHNOLOGY, AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN No.	DATE	REMARK
A	NEW	2018.03.06	NEW RELEASE
B		2020.09.22	1.中隔片两侧屏蔽片外露，公头对插时接触更稳定 2.端子SMT根部加宽，改善高频性能 3.EMC弹片用INSERT MOLDING结构，结构更稳定

- NOTE:
- CURRENT RATING:5.0A
  - Contact Resistance:40mOHM Max.;
  - Dielectric Withstanding Voltage:100V AC For 1 Minute;
  - Insulation Resistance:100M OHM Min.;
  - Mating And Unmating Force:  
Mating Force: 5~20N  
Unmating Force: 8~20N;  
6~20N AFTER TEST;
  - Durability:10000 Cycles;



PART NUMBER CODE:	Item	Title	Material	Dispose	Q'TY
CF102-24LB01R-C3	1	Shell	SUS304	Ni:30u" Min.	1PCS
	2	GND Plate	SUS301		2PCS
	3	Mid Plate	SUS301		1PCS
	4	Contact	C7025	Mating Area: Au 1u" Solder Tails: Matt Tin	2PCS
	5	InsertMolding	LCP E6808	UL 94V-0 Black	1PCS
	6	COVER	LCP E6808	UL 94V-0 Black	1PCS

PART NO.: SEE THE PART NUMBER CODE		GOLDCONN TECHNOLOGIES COMPANY LIMITED		DRAWN BY SAM	DATE 2020-04-15
GENERAL TOLERANCES (UNLESS SPECIFIED)		TITLE USB 3.1 TYPE C FEMALE VERTICAL H 13.5mm SMT TYPE		CHECKED BY JAY	DATE 2020-04-15
QUALITY SYMBOL	0	x.xxxxx	± ---	APPROVED BY JACKY	DATE 2020-04-15
	0	x.xxx	± 0.10	DWG.NO. CF102-24-C3	
	0	x.xx	± 0.25	SHEET NO. 1 OF 2	
	0	x.x	± 0.30	SCALE 1:1	
	0	ANGULAR	± ---°	DIMENSION STYLE MM ONLY	
		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	

